

# DYNACORE LED BATTERY VIDEO LIGHT

**Model: D-L5000 Professional Video LED Light 5600K**

## Overview::

The new D-L5000 LED Light System features a light weight, compact design and lower consumption. The model use 5pcs of coolwhite power LED(CREE<sup>(R)</sup> XLamp<sup>(R)</sup>) with brightness of 700lx@1m. It is powered by Lithium battery DC7V-17V(DC7.2V DV battery or DC14.8V battery via DC connector), Operating life is more than 100,000 hours.

## Highlights:

- Brightness of 700 lx (1 m), life of approx. 100,000 hours (whole unit), and power consumption of 12 W
- Uniform lighting over the entire projected area
- Frosting diffuser attached to soften shadows and reduce contrast
- Compatible with camcorder batteries, such as the NP-F770/F970(Dynacore DV-4S/DV-6S)
- Long operating time: approximately 4 hours with the NP-F970 (at maximum brightness)

## Features:


|  |   |
|--|---|
| <ul style="list-style-type: none"><li>• Battery:</li></ul>               | <ul style="list-style-type: none"><li>• Dynacore DC7.2V DV battery or DC14.8V battery via DC connector on the light</li></ul> |
| <ul style="list-style-type: none"><li>• LED Light System:</li></ul>      | <ul style="list-style-type: none"><li>• 5pcs of coolwhite power LED(CREE<sup>(R)</sup> XLamp<sup>(R)</sup>)</li></ul>         |
| <ul style="list-style-type: none"><li>• Brightness (measured):</li></ul> | <ul style="list-style-type: none"><li>• approx. 700 lx @1m</li></ul>  |
| <ul style="list-style-type: none"><li>• Color Temperature:</li></ul>     | <ul style="list-style-type: none"><li>• 5600K daylight</li></ul>  |
| <ul style="list-style-type: none"><li>• Operation Time:</li></ul>        | <ul style="list-style-type: none"><li>• Approx. 4 hours (with NP-F970)</li></ul>  |


|  |  |
|--|--|
| <ul style="list-style-type: none"> <li>• Dimmer Dial:</li> </ul> | <ul style="list-style-type: none"> <li>• Can adjust brightness from 100%-1%</li> </ul> |
|--|--|

### Specifications:

|  |   |
|--|---|
| <ul style="list-style-type: none"> <li>• Model</li> </ul>              | <ul style="list-style-type: none"> <li>• D-L5000</li> </ul>                   |
| <ul style="list-style-type: none"> <li>• Input Voltage</li> </ul>      | <ul style="list-style-type: none"> <li>• DC 7V-17V</li> </ul>                 |
| <ul style="list-style-type: none"> <li>• Power consumption</li> </ul>  | <ul style="list-style-type: none"> <li>• 12W(Max)</li> </ul>                  |
| <ul style="list-style-type: none"> <li>• Color Temperature:</li> </ul> | <ul style="list-style-type: none"> <li>• 5600K daylight</li> </ul>            |
| <ul style="list-style-type: none"> <li>• Brightness</li> </ul>         | <ul style="list-style-type: none"> <li>• approx. 700 lx @1m</li> </ul>        |
| <ul style="list-style-type: none"> <li>• Weight</li> </ul>             | <ul style="list-style-type: none"> <li>• 500g without battery pack</li> </ul> |
| <ul style="list-style-type: none"> <li>• Dimension</li> </ul>          | <ul style="list-style-type: none"> <li>• 138 x 108 x 65 mm</li> </ul>         |

### Picture:

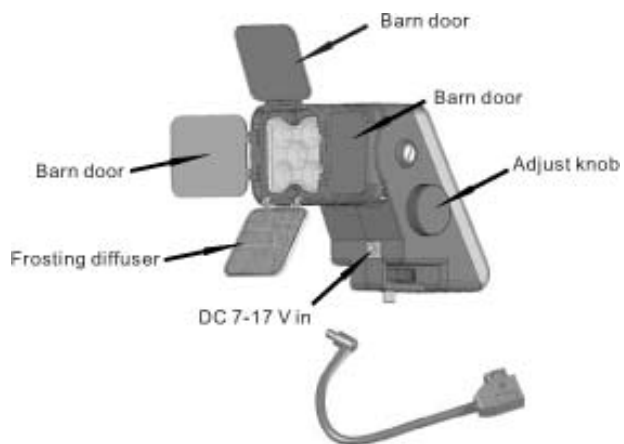

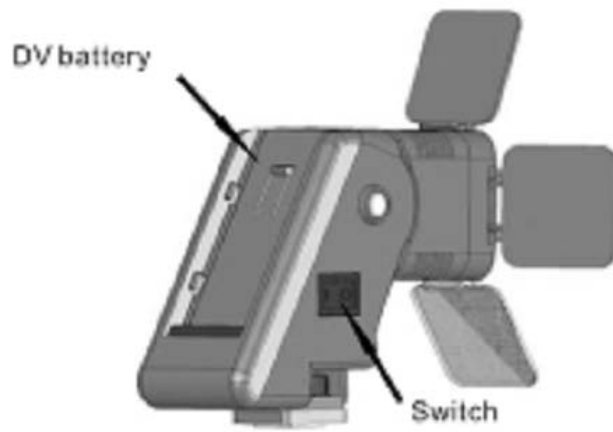

## **DYNACORE**

Dynacore Technology Co.,Ltd  
Room 409-416, Chuangli Business Mansion,  
58# Mochou Lake East Road,  
Nanjing, 210029  
P.R.China

[www.dynacore-china.com](http://www.dynacore-china.com)  
Tel: 0086 25 86603989  
Fax: 0086 25 86560560  
E-mail: [info@dynacore-china.com](mailto:info@dynacore-china.com)