


DSR Fluorescent Soft light Range

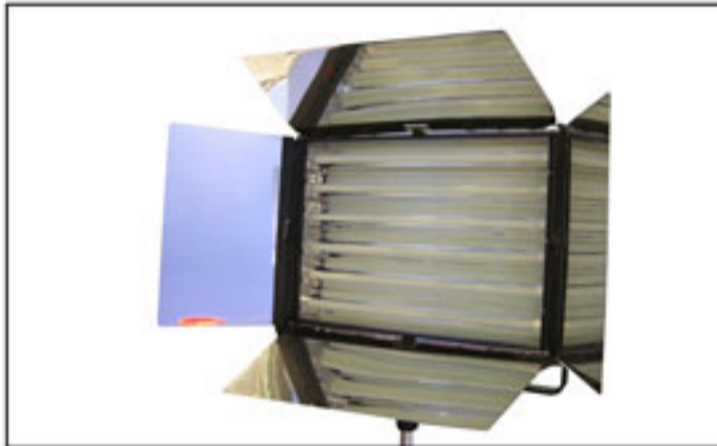

Descriptions

- Soft, even, smooth light field free of exposure of heat from the beam emission.
- High light output from the luminaries with high efficiency reflector and barn door.
- High color rendering index (CRI up to 85-95). Optimum effects shall be expected when the luminary use halogen lamps.
- High illumination of lamp tubes (70-80 lumens/watt) and longer lamp life (imported lamps rated more than less than 10000 hours.)
- Energy-saving components utilized to save electrical energy by 70%.
- Lamp holders mounted meet international safety standards; imported electronic ballasts are used for lower noise and reliable operations.
- Added dimming function optional with imported ballasts enabling a wide dimming range while maintaining a constant color temperature.
- Ideal for lighting applications for medium and small-sized studios and conference rooms as well as news studio.

Technical Specification

Item No.	Wattage (W)	Dimensions (mm)	Weights (Kg)	Power supply V Frequency(Hz)	Spigot (mm)	Colour t temperature(K)
DSR-II36×2	72	480×240×150	4.75	220/50~60	φ28×75	3200
DSR-II 36×4	144	480×365×150	6.85			
DSR-II 36×6	216	450×520×150	9.3			
DSR-II 55×2	110	605×240×150	5.7			
DSR-II 55×4	220	605×365×150	7.9			
DSR-II 55×6	330	450×645×150	10.4			